

08/10/99
JCS55 U.S. PTO
09/371760

FORM PTO-1082

EXPRESS MAIL LABEL NO.: EL017117649US
PATENT
Attorney Docket No.: 25484.00750
Date: August 10, 1999

JCS525 U.S. PTO
09/371760
08/10/99

BOX PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): Tomoyuki FUNAKI

For: DEVICE AND METHOD FOR ANALYZING SOUND SIGNAL FOR REPRESENTING THE SIGNAL IN MUSICAL NOTATION


Enclosed are:

- 35 Pages of Specification
- 9 Sheets of drawing (☒ formal ☐ informal)
- ☒ Declaration and Power of Attorney. ☐ Will follow.
- ☒ Form PTO-1595 and an assignment of the invention to YAMAHA CORPORATION, of 10-1, Nakazawa-cho, Hamamatsu-shi Shizuoka-ken, JAPAN ☐ Will follow.
- ☒ A certified copy of Japanese Pat. Appln. No. 10-247208, filed September 1, 1998, from which priority is claimed in the subject case pursuant to Rule 55b and 35 U.S.C. 119. ☐ Will follow.
- ☐ An associate Power of Attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☒ Information Disclosure Statement, Form PTO 1449 and 4 prior art reference(s).
- ☐ Preliminary Amendment.
- ☒ General Authorization/Request to Petition for extension of time.
- ☒ Postcard

FOR.	NO. FILED	NO. EXTRA	SMALL ENTITY RATE	SMALL ENTITY FEE		OTHER THAN SMALL ENTITY RATE	OTHER THAN SMALL ENTITY FEE
BASIC FEE				\$380.00	OR		\$ 760.00
TOTAL CLAIMS	21-20=	-1-	X 9	\$	OR	X 18	\$ 18.00
INDEP CLAIMS	9-3=	-6-	X 39	\$	OR	X 78	\$ 468.00
MULTIPLE DEP CLAIMS PRESENTED			X+ 130	\$	OR	+ 260	\$
			TOTAL =			TOTAL:	\$1246.00

- ☐ Please charge my Deposit Account No. 07-1853 the amount of \$_____ . A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$1246.00 to cover the filing fee is enclosed.
- ☒ A check in the amount of \$40.00 to cover the Assignment Recordal Fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associate with this communication or credit any overpayment to Deposit Account No. 07-1853. A duplicate copy of this sheet is enclosed.
 - ☒ Any additional filing fees required under 37 CFR 1.16.
 - ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 07-1853. A duplicate copy of this sheet is enclosed.
 - ☐ Any patent application processing fees required under 37 CFR 1.17.
 - ☐ The issue fee set in 37CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.31(b).
 - ☐ Any filing fees under 37 CFR 1.16 for presentation or extra claims.

Respectfully submitted,


David L. Fehrman
Registration No. 28,600

GRAHAM & JAMES LLP
801 S. Figueroa St., 14th Fl.
Los Angeles, CA 90017-5554
(213) 624-2500

08/10/99 09/371760

- 1 -

Title of the Invention

Device and Method for Analyzing Sound Signal for
Representing the Signal in Musical Notation

Background of the Invention

The present invention relates generally to sound signal analyzing devices and methods for creating a MIDI file or the like on the basis of input sounds from a microphone or the like, and more particularly to an improved sound signal analyzing device and method which can effectively optimize various parameters for use in sound signal analysis.

Examples of the conventional sound signal analyzing devices include one in which detected volume levels and highest and lowest pitch limits, etc. of input vocal sounds have been set as parameters for use in subsequent analysis of sound signals. These parameters are normally set in advance on the basis of vocal sounds produced by ordinary users and can be varied as necessary by the users themselves when the parameters are to be put to actual use.

However, because the input sound levels tend to be influenced considerably by the operating performance of hardware components used and various ambient conditions, such as noise level, during sound input operations, there arises a need to review the level settings from time to time. Further, the upper and lower pitch limits would influence pitch-detecting filter characteristics during the sound signal analysis, and thus it is undesirable to

550T80-0927260

immoderately increase a difference or width between the upper and lower pitch limits. Unduly increasing the width between the upper and lower pitch limits is undesirable in that it would result in a wrong pitch being detected due to harmonics and the like of the input sound. In addition, because the conventional sound signal analyzing devices require very complicated and sophisticated algorithm processing to deal with the pitch detection over a wide pitch range, the processing could not be readily carried out in real time. Moreover, even for some of the parameters appropriately modifiable by the users, it is necessary for the users to have a certain degree of musical knowledge, and therefore it is not desirable for the users to have freedom in changing the parameters. However, because some of the users may produce vocal sounds of a unique pitch range far wider than those produced by ordinary users or of extraordinary high or low pitches, it is very important that the parameters should be capable of being modified as necessary in accordance with the unique tendency and characteristics of the individual users.

Summary of the Invention

It is therefore an object of the present invention to provide a device and method for analyzing a sound signal for representation in musical notation which can modify various parameters for use in the sound signal analysis in accordance with types of the parameters and characteristics of a user's vocal sound.

In order to accomplish the above-mentioned object,

the present invention provides an improved sound signal analyzing device which comprises: an input section that receives a sound signal; a characteristic extraction section that extracts a characteristic of the sound signal received by the input section; and a setting section that sets various parameters for use in analysis of the sound signal, in accordance with the characteristic of the sound signal extracted by the characteristic extraction section. Because of the arrangement that a characteristic of the received or input sound signal is extracted via the extraction section, even when the received sound signal variously differs depending on its sound characteristic (such as a user's singing ability, volume or range), various parameters can be appropriately altered in accordance with the difference in the extracted characteristic of the sound signal, which thereby greatly facilitates setting of the necessary parameters.

For example, the characteristic extraction section may extract a volume level of the received sound signal as the characteristic, and the above-mentioned setting section may set a threshold value for use in the analysis of the sound signal, in accordance with the volume level extracted by the characteristic extraction section. Thus, by setting an appropriate threshold value for use in the sound signal analysis, it is possible to set appropriate timing to detect a start point of effective sounding of the received sound signal, i.e., key-on detection timing, in correspondence to individual users' vocal sound

characteristics (sound volume levels specific to the individual users). As a consequence, the sound pitch and generation timing can be analyzed appropriately on the basis of the detection timing.

Alternatively, the characteristic extraction section may extract the upper and lower pitch limits of the sound signal as the characteristic, and the setting section may set a filter characteristic for use in the analysis of the sound signal, in accordance with the upper and lower pitch limits extracted by the characteristic extraction section. By the setting section setting the filter characteristic for the sound signal analysis to within an appropriate range, the characteristic of a band-pass filter or the like intended for sound pitch determination can be set appropriately in accordance with the individual users' vocal sound characteristics (sound pitch characteristics specific to the individual users). In this way, it is possible to effectively avoid the inconvenience that a harmonic pitch is detected erroneously as a fundamental pitch or a pitch to be detected can not be detected at all.

According to another aspect of the present invention, there is provided a sound signal analyzing device which comprises: an input section that receives a sound signal; a pitch extraction section that extracts a pitch of the sound signal received by the input section; a scale designation section that sets a scale determining condition; and a note determination section that, in

scale notes. For the diatonic scale notes, a pitch of a user-input sound, even if it is somewhat deviated from a corresponding right pitch, can be identified as a scale note (one of the diatonic scale notes); on the other hand, for the non-diatonic scale notes, a pitch of a user-input sound can be identified as one of the non-diatonic scale notes (i.e., a note deviated a semitone or one half step from the corresponding diatonic scale note) only when it is considerably close to a corresponding right pitch. With this arrangement, the scale determining performance can be enhanced considerably and any non-diatonic scale note input intentionally by the user can be identified appropriately, which therefore allows each input sound signal to be automatically converted or transcribed into musical notation having a superior musical quality. In addition, the arrangement permits assignment to appropriate scale notes (i.e., scale note determining process) according to the user's singing ability.

Further, the sound signal analyzing device may further comprise: a setting section that sets unit note length as a predetermined criterion for determining a note length; and a note length determination section that determines a length of the scale note, determined by the note determination section, using the unit note length as a minimum determining unit, i.e., with an accuracy of the unit note length. With this arrangement, an appropriate quantization process can be carried out by just variably setting the minimum determining unit, and an appropriate

operational sequence of a musical notation process of Fig. 1;

Fig. 7 is a diagram illustrating a parameter setting screen displayed as a result of an initialization process of Fig. 1;

Figs. 8A, 8B and 8C are diagrams conceptually explanatory of scale rounding conditions corresponding to 12-tone scale designation, intermediate scale designation and key scale designation;

Fig. 9 is a diagram illustrating a dialog screen displayed during the sound-volume threshold value setting process of Fig. 1; and

Fig. 10 is a diagram illustrating a dialog screen displayed during the sound pitch range setting process of Fig. 1.

Detailed Description of the Preferred Embodiments

Fig. 2 is a block diagram illustrating a general hardware setup of a personal computer that functions as a sound signal analyzing device in accordance with an embodiment of the present invention. This personal computer is controlled by a CPU 21, to which are connected, via a data and address bus 2P, various components, such as a program memory (ROM) 22, a working memory 23, an external storage device 24, a mouse operation detecting circuit 25, a communication interface 27, a MIDI interface 2A, a microphone interface 2D, a keyboard (K/B) operation detecting circuit 2F, a display circuit 2H, a tone generator circuit 2J and an effect circuit 2K. While

the personal computer may include other hardware components, the personal computer according to this embodiment will be described below as only including these hardware resources essential for implementing various features of the present invention.

The CPU 21 carries out various processes based on various programs and data stored in the program memory 22 and working memory 23 as well as musical composition information received from the external storage device 24. In this embodiment, the external storage device 24 may comprise any of a floppy disk drive, hard disk drive, CD-ROM drive, magneto-optical disk (MO) drive, ZIP drive, PD drive and DVD drive. Composition information and the like may be received from another MIDI instrument 2B or the like external to the personal computer, via the MIDI interface 2A. The CPU 21 supplies the tone generator circuit 2J with the composition information received from the external storage device 24, to audibly reproduce or sound the composition information through an external sound system 2L.

The program memory 22 is a ROM having prestored therein various programs including system-related programs and operating programs as well as various parameters and data. The working memory 23 is provided for temporarily storing data generated as the CPU 21 executes the programs, and it is allocated in predetermined address regions of a random access memory (RAM) and used as registers, flags, buffers, etc. Some or all of the operating programs and

various data may be prestored in the external storage device 24 such as the CD-ROM drive rather than in the program memory or ROM 22 and may be transferred into the working memory or RAM 23 or the like for storage therein. This arrangement greatly facilitates installment and version-up of the operating programs etc.

Further, the personal computer of Fig. 2 may be connected via the communication interface 27 to a communication network 28, such as a LAN (Local Area Network), the Internet or telephone line network, to exchange data (e.g., composition information with associated data) with a desired sever computer. Thus, in a situation where the operating programs and various data are not contained in the personal computer, these operating programs and data can be downloaded from the server computer to the personal computer. Specifically, in such a case, the personal computer, which is a "client", sends a command to request the server computer 29 to download the operating programs and various data by way of the communication interface 27 and communication network 28. In response to the command, the server computer 29 delivers the requested operating programs and data to the personal computer via the communication network 28. Then, the personal computer receives the operating programs and data via the communication interface 27 and stores them into the RAM 23 or the like. In this way, the necessary downloading of the operating programs and various data is completed.

It will be appreciated that the present invention may be implemented by a commercially-available electronic musical instrument or the like having installed therein the operating programs and various data necessary for practicing the present invention, in which case the operating programs and various data may be stored on a recording medium, such as a CD-ROM or floppy disk, readable by the electronic musical instrument and supplied to users in the thus-stored form.

Mouse 26 functions as a pointing device of the personal computer, and the mouse operation detecting circuit 25 converts each input signal from the mouse 26 into position information and sends the converted position information to the data and address bus 2P. Microphone 2C picks up a human vocal sound or musical instrument tone to convert it into an analog voltage signal and sends the converted voltage signal to the microphone interface 2D. The microphone interface 2D converts the analog voltage signal from the microphone 2C into a digital signal and supplies the converted digital signal to the CPU 21 by way of the data and address bus 2P. Keyboard 2E includes a plurality of keys and function keys for entry of desired information such as characters, as well as key switches corresponding to these keys. The keyboard operation detecting circuit 2F includes key switch circuitry provided in corresponding relation to the individual keys and outputs a key event signal corresponding to a depressed key. In addition to such hardware switches, various

software-based button switches may be visually shown on a display 2G so that any of the button switches can be selectively operated by a user or human operator through software processing using the mouse 26. The display circuit 2H controls displayed contents on the display 2G that may include a liquid crystal display (LCD) panel.

The tone generator circuit 2J, which is capable of simultaneously generating tone signals in a plurality of channels, receives composition information (MIDI files) supplied via the data and address bus 2P and MIDI interface 2A and generates tone signals on the basis of the received information. The tone generation channels to simultaneously generate a plurality of tone signals in the tone generator circuit 2J may be implemented by using a single circuit on a time-divisional basis or by providing separate circuits for the individual channels on a one-to-one basis. Further, any tone signal generation method may be used in the tone generator circuit 2J depending on an application intended. Each tone signal generated by the tone generator circuit 2J is audibly reproduced or sounded through the sound system 2L including an amplifier and speaker. The effect circuit 2 is provided, between the tone generator circuit 2J and the sound system 2L, for imparting various effects to the generated tone signals; alternatively, the tone generator circuit 2J may itself contain such an effect circuit. Timer 2N generates tempo clock pulses for counting a designated time interval or setting a desired performance tempo to reproduce recorded

composition information, and the frequency of the performance tempo clock pulses is adjustable by a tempo switch (not shown). Each of the performance tempo clock pulses generated by the timer 2N is given to the CPU 21 as an interrupt instruction, in response to which the CPU 21 interruptively carries out various operations during an automatic performance.

Now, with reference to Figs. 1 and 3 to 10, a detailed description will be made about exemplary behavior of the personal computer of Fig. 2 when it functions as the sound signal analyzing device. Fig. 1 is a flow chart of a main routine executed by the CPU 21 of the personal computer functioning as the sound signal analyzing device.

At first step of the main routine, a predetermined initialization process is executed, where predetermined initial values are set in various registers and flags within the working memory 23. As a result of this initialization process, a parameter setting screen 70 is shown on the display 2G as illustrated in Fig. 7. The parameter setting screen 70 includes three principal regions: a recording/reproduction region 71; a rounding setting region 72; and a user setting region 73.

The recording/reproduction region 71 includes a recording button 71A, a MIDI reproduction button 71B and a sound reproduction button 71C. Activating or operating a desired one of the buttons starts a predetermined process corresponding to the operated button. Specifically, once

the recording button 71A is operated, user's vocal sounds picked up by the microphone 2C are sequentially recorded into the sound signal analyzing device. Each of the thus-recorded sounds is then analyzed by the sound signal analyzing device to create a MIDI file. Basic behavior of the sound signal analyzing device is described in detail in Japanese Patent Application No. HEI-9-336328 filed earlier by the assignee of the present application, and hence a detailed description of the device behavior is omitted here. Once the MIDI reproduction button 71B is operated, the MIDI file created by the analyzing device is subjected to a reproduction process. It should be obvious that any existing MIDI file received from an external source can also be reproduced here. Further, once the sound reproduction button 71C is operated, a live sound file recorded previously by operation of the recording button 71A is reproduced. Note that any existing sound file received from an external source can of course be reproduced in a similar manner.

The rounding setting region 72 includes a 12-tone scale designating button 72A, an intermediate scale designating button 72B and a key scale designating button 72C, which are operable by the user to designate a desired scale rounding condition. In response to operation of the 12-tone scale designating button 72A by the user, analyzed pitches are allocated, as a scale rounding condition for creating a MIDI file from a recorded sound file, to the notes of the 12-tone scale. In response to operation of

the key note scale designating button 72C, pitches of input sounds are allocated, as the rounding condition, to the notes of a 7-tone diatonic scale of a designated musical key. If the designated key scale is C major, the input sound pitches are allocated to the notes corresponding to the white keys. Of course, if the designated key scale is other than C major, the notes corresponding to the black keys can also become the diatonic scale notes. Further, in response to operation of the intermediate scale designating button 72B, a rounding process corresponding to the key scale (i.e., 7-tone scale) is, in principle, carried out, in which, only when the analyzed result shows that the pitch is deviated from the corresponding diatonic scale note approximately by a semitone or one half step, the pitch is judged to be as a non-diatonic scale note. Namely, this rounding process allows the input sound pitch to be allocated to a non-diatonic scale note.

Figs. 8A to 8C conceptually show different rounding conditions. More specifically, Figs. 8A, 8B and 8C are diagrams showing concepts of scale rounding conditions corresponding to the 12-tone scale designation, intermediate scale designation and key scale designation. In Figs. 8A to 8C, the direction in which the keyboard keys are arranged (i.e., the horizontal direction) represents a sound pitch, i.e., sound frequency determined as a result of the sound signal analysis. Thus, for the 12-tone scale designation of Fig. 8A, a boundary is set centrally between pitches of every adjacent scale notes, and the sound

frequencies determined as a result of the sound signal analysis are allocated to all of the 12 scale notes. For the key scale designation of Fig. 8C, diatonic scale notes are judged using, as boundaries, the frequencies of the black-key-corresponding notes (C#, D#, F#, G# and A#), i.e., non-diatonic scale notes, and each sound frequency determined as a result of the sound signal analysis is allocated to any one of the diatonic scale notes. For the intermediate scale designation of Fig. 8B, however, the frequency determining ranges allocated to the black-key-corresponding notes (C#, D#, F#, G# and A#), i.e., non-diatonic scale notes, are set to be narrower than those set for the 12-tone scale designation of Fig. 8A, although the frequency allocation is similar, in principle, to that for the 12-tone scale designation of Fig. 8A. More specifically, while an equal frequency determining range is set between the 12 scale notes in the example of Fig. 8A, the frequency determining range between the black-key-corresponding notes, i.e., non-diatonic scale notes, in the example of Fig. 8B is extremely narrower. Note that the frequency determining ranges may be set to any suitable values. The reason why the black-key-corresponding notes (C#, D#, F#, G# and A#), i.e., non-diatonic scale notes, --denoted below the intermediate scale designating button 72B in Fig. 7 for illustration of scale allocation states-- are each shown in an oval shape is that they correspond to the narrower frequency determining ranges. Namely, only when the input sound pitch is substantially coincident with

or considerably close to the pitch of the non-diatonic scale note, it is judged to be a non-diatonic scale note (i.e., a note deviated from the corresponding diatonic scale note by a semitone).

The rounding setting region 72 also includes a non-quantizing button 72D, a two-part dividing button 72E, a three-part dividing button 72F and a four-part dividing button 72G, which are operable by the user to designate a desired measure-dividing condition for the sound signal analysis. Once any one of these buttons 72D to 72G is operated by the user, the sound file is analyzed depending on a specific number of divided measure segments (i.e., measure divisions) designated via the operated button, to thereby create a MIDI file. To the right of the buttons 72D to 72G of Fig. 7, indicators of measure dividing conditions corresponding thereto are also visually displayed in instantly recognizable form. Namely, the indicator to the right of the non-quantizing button 72D shows that the start point of the sound duration is set optionally in accordance with an analyzed result of the sound file with no quantization. The indicator to the right of the two-part dividing button 72E shows that the start of the sound duration is set at a point corresponding to the length of an eighth note obtained, as a minimum unit note length, by halving one beat (quarter note). Similarly, the indicator to the right of the three-part dividing button 72F shows that the start of the sound duration is set at a point corresponding to the length of a triplet obtained

Further, the user setting region 73 of Fig. 7 includes a level setting button 73A and a sound pitch range setting button 73B, activation of which causes a corresponding process to start. Namely, once the level setting button 73A is operated by the user, a level check screen is displayed as exemplarily shown in Fig. 9. This level check screen includes: a level meter area 91 using colored illumination to indicate a current sound volume level on a real-time basis; a level pointer 92 moving vertically or in a direction transverse to the level meter calibrations as the sound volume level rises or falls; a sign 93 indicating that the level pointer 92 corresponds to a level indicating window 94 showing a currently-designated sound volume level in a numerical value; a confirming button ("OK" button) 95 for confirming the designated sound volume level; and a "cancel" button 96 for cancelling a level check process. Any desired numerical value can be entered into the level indicating window 94 directly via the keyboard 2E of Fig. 2. The user's vocal sound is analyzed in accordance with the sound volume level

set via the level check screen.

Once the sound pitch range setting button 73B is operated by the user, a pitch check screen is displayed as exemplarily shown in Fig. 10. This pitch check screen includes a first pointer 101 for indicating an upper pitch limit in a currently-set sound pitch range, a second pointer 102 for indicating an lower pitch limit in the currently-set sound pitch range, and a third pointer 109 for indicating a pitch of a vocal sound currently input from the user, which together function to show which region of the keyboard 2E the currently-set sound pitch range corresponds to. The keyboard region in question may be displayed in a particular color different from that of the remaining region of the keyboard, in addition to or in place of using the first and second pointers 101 and 102. The pitch check screen also includes a sign 103 indicating that the first pointer 101 corresponds to a numerical value displayed by an upper pitch limit indicating window 105 located adjacent to the sign 103, and a sign 104 indicating that the second pointer 102 corresponds to a numerical value displayed by a lower pitch limit indicating window 106 located adjacent to the sign 104. Any desired numerical values can be entered into the upper and lower pitch limit indicating windows 105 and 106 directly via the keyboard 2E. The pitch check screen further includes a confirming or "OK" button 107 and a "cancel" button 108 similarly to the above-mentioned level check screen. The user's vocal sound is analyzed in accordance with the sound

pitch range set via the pitch check screen.

With the parameter setting screen 70 displayed in the above-mentioned manner, the user can set various parameters by manipulating the mouse 2C. The main routine of Fig. 1 executes various determinations corresponding to the user's manipulation of the mouse 2C. Namely, it is first determined whether or not the sound pitch range setting button 73B has been operated by the user, and if an affirmative (YES) determination is made, the routine carries out a sound pitch range setting process as shown in Fig. 3. In this sound pitch range setting process, a predetermined dialog screen is displayed, and detection is made of a pitch of a vocal sound input via the microphone 2C. Then, a user-designated sound pitch range is set as by changing the color of the keyboard region corresponding to the detected sound pitch and also changing the positions of the first and second pointers 101 and 102 on the dialog screen of Fig. 10. Such a series of sound pitch setting operations is repeated until the confirming (OK) button 107 is operated. Then, once the confirming (OK) button 107 is operated, a pitch-extracting band-pass filter coefficient is set in accordance with the keyboard region between the upper and lower pitch limits currently displayed on the dialog screen at the time point when the confirming (OK) button 107 is operated. In this way, the sound pitch range corresponding to the user's vocal sound can be set in the sound signal analyzing device.

Next, in the main routine, a determination is made

as to whether the level setting button 73A has been operated in the user setting area 73 of the parameter setting screen 70, and with an affirmative (YES) determination, a sound-volume threshold value setting process is carried out as shown in Fig. 4. In this sound-volume threshold value setting process, the dialog screen of Fig. 9 is displayed, and detection is made of a volume level of the vocal sound input via the microphone 2C. Then, the color of the level meter area 91 is varied in real time in accordance with the detected sound volume level. Displayed position of the pointer 92 indicating a maximum sound volume level, i.e., a criterion or reference level, is determined in the following manner. Namely, it is ascertained whether or not the currently-detected sound volume level is higher than the currently-set reference level. If so, the criterion or reference level, i.e., the maximum sound volume level, and the displayed position of the pointer 92 are changed in conformity to the currently-detected sound volume level. If, on the other hand, the currently-detected sound volume level is lower than the current reference level, it is further determined whether the sound volume level has been found to be decreasing consecutively over the last n detections; if so (YES), the reference level, i.e., the maximum sound volume level, and the displayed position of the pointer 92 are changed in conformity to the currently-detected sound volume level. If the currently-detected sound volume level is lower than the current reference level but the sound volume level has

not necessarily been decreasing consecutively over the last n detections, it is further determined whether the sound volume level has been lower than a predetermined "a" value (e.g., 90% of the reference level) consecutively over the last m ($m < n$) detections; if so (YES), the reference level, i.e., the maximum sound volume level, and the displayed position of the pointer 92 are changed in conformity to the currently-detected sound volume level similarly to the above-mentioned. If, on the other hand, the sound volume level has not been lower than the "a" value consecutively over the last m detections, the current reference level is maintained. Through such a series of operations, the criterion or reference level, i.e., the maximum sound volume level, and the displayed position of the pointer 92 can be varied momentarily. The series of operations is repeated until the confirming (OK) button 95 is operated, upon which a sound volume threshold value, for use in pitch detection, key-on event detection or the like, is set in accordance with the maximum sound volume level (reference level) being displayed on the dialog screen of Fig. 9. For instance, a pitch detection process may be performed on sound signals having a volume level greater than the sound volume threshold value, or a process may be performed for detecting, as a key-on event, every detected sound volume level greater than the sound volume threshold value.

Next, in the main routine of Fig. 1, a determination is made as to whether any one of the buttons 72A to 72G

has been operated in the rounding setting region 72 of the parameter setting screen 70, and a rounding condition setting process is carried out as exemplarily shown in Fig. 5. In this rounding condition setting process, a different operation is executed depending on the button operated by the user. Namely, if one of the measure dividing buttons 72D to 72G has been operated, it is determined that a specific number of measure divisions has been designated by the user, so that a predetermined operation is executed for setting the designated number of measure divisions. If, on the other hand, one of the rounding condition designating buttons 72A to 72C has been operated, it is determined that a specific scale has been designated, so that a predetermined operation is executed for setting the scale (rounding of intervals or distances between adjacent notes) corresponding to the operated button. Such a series of operations is repeated until the confirming (OK) button 72H is operated.

Finally, in the main routine of Fig. 1, a determination is made as to whether or not any button relating to performance or musical notation (or transcription) (not shown) has been operated by the user, and if so, a predetermined process is carried out which corresponds to the operated button. For example, if a performance start button has been operated by the user, a performance process flag is set up, or if a musical notation (or transcription) process start button has been operated, a musical notation process flag is set up. Upon

completion of the above-described operations related to the parameter setting screen 70 of Fig. 7, the musical notation and performance processes are carried out in the instant embodiment. The musical notation process, which is carried out in this embodiment for taking the analyzed sound signal characteristics down on sheet music or score, is generally similar to that described in Japanese Patent Application No. HEI-9-336328 as noted earlier, and therefore its detailed description is omitted here for simplicity. The performance process is carried out on the basis of the conventionally-known automatic performance technique and its detailed description is also omitted here. It should also be appreciated that the musical notation process is performed in accordance with the scale rounding condition selected by the user as stated above.

Fig. 6 is a flow chart illustrating an exemplary operational sequence of the musical notation process when the process is carried out in real time simultaneously with input of the vocal sound. Namely, while the sound signal analyzing device in the above-mentioned prior Japanese patent application is described as analyzing previously-recorded user's vocal sounds, the analyzing device according to the preferred embodiment of the present invention is designed to execute the musical notation process in real time on the basis of each vocal sound input via the microphone. In this musical notation or transcription process, detection is made of a pitch of each input vocal sound in real time. Note that various

modified or varied appropriately depending on the types of the parameters and characteristics of user's vocal sounds.

SECRET

What is claimed is:

1. A sound signal analyzing device comprising:
an input section that receives a sound signal;
a characteristic extraction section that extracts a characteristic of the sound signal received by said input section; and
a setting section that sets various parameters for use in analysis of the sound signal, in accordance with the characteristic of the sound signal extracted by said characteristic extraction section.
2. A sound signal analyzing device as recited in claim 1 wherein said characteristic extraction section extracts a volume level of the sound signal as said characteristic, and said setting section sets a threshold value for use in the analysis of the sound signal, in accordance with the volume level extracted by said characteristic extraction section.
3. A sound signal analyzing device as recited in claim 1 wherein said characteristic extraction section extracts upper and lower pitch limits of the sound signal as said characteristic, and said setting section sets a filter characteristic for use in the analysis of the sound signal, in accordance with the upper and lower pitch limits extracted by said characteristic extraction section.

determining condition.

8. A sound signal analyzing device as recited in claim 7 wherein to select the 7-tone scale, said scale designation section can select one of a normal scale determining condition for only determining diatonic scale notes and an intermediate scale determining condition for determining non-diatonic scale notes as well as the diatonic scale notes.

9. A sound signal analyzing device as recited in claim 8 wherein said note determination section sets frequency ranges for determining the non-diatonic scale notes to be narrower than frequency ranges for determining the diatonic scale notes.

10. A sound signal analyzing device as recited in claim 6 which further comprises:

a setting section that sets unit note length as a predetermined criterion for determining a note length; and

a note length determination section that determines a length of the scale note determined by said note determination section with an accuracy of the unit note length.

11. A sound signal analyzing method comprising the steps of:

receiving a sound signal;

12. A sound signal analyzing method comprising the steps of:

receiving a sound signal;

setting a scale determining condition; and

13. A sound signal analyzing method as recited in claim 12 which further comprises:

a step of setting a unit note length as a predetermined criterion for determining a note length; and

a step of determining a length of the scale note determined by said step of determining a particular one of scale notes, with an accuracy of the unit note length.

14. A machine-readable medium containing a group of

instructions of a sound signal analyzing program for execution by a computer, said sound signal analyzing program comprising the steps of:

receiving a sound signal;

extracting a characteristic of the sound signal received by said step of receiving; and

setting various parameters for use in analysis of the sound signal, in accordance with the characteristic of the sound signal extracted by said step of extracting.

15. A machine-readable medium containing a group of instructions of a sound signal analyzing program for execution by a computer, said sound signal analyzing program comprising the steps of:

receiving a sound signal;

extracting a pitch of the sound signal received by said step of receiving;

setting a scale determining condition; and

in accordance with the scale determining condition set by said step of setting, determining a particular one of scale notes which the pitch of the sound signal extracted by said step of extracting corresponds to.

16. A machine-readable medium as recited in claim 15 which further comprises:

a step of setting a unit note length as a predetermined criterion for determining a note length; and

a step of determining a length of the scale note determined by said step of determining a particular one of scale notes, with an accuracy of the unit note length.

17. A method of receiving a sound signal and automatically representing the sound signal in musical notation, said method comprising:

a first step of receiving at least part of a sound signal to be represented in musical notation, extracting a characteristic of the received sound signal, and setting various parameters for use in analysis of the sound signal in accordance with the extracted characteristic;

a second step of setting a scale determining condition;

a third step of receiving a sound signal to be represented in musical notation and determining a pitch of the sound signal using the various parameters set by said first step; and

a fourth step of, in accordance with the scale determining condition set by said second step, rounding the pitch determined by said third step to any one of scale notes corresponding to the scale determining condition.

18. A method as recited in claim 17 which further comprises:

a step of setting a unit note length as a predetermined criterion for determining a note length; and

a step of determining a length of the scale note determined by said fourth step from the received sound signal, with an accuracy of the unit note length.

19. A machine-readable medium containing a group of instructions of a program for receiving a sound signal and automatically representing the sound signal in musical notation via a computer, said program comprising:

a first step of receiving at least part of a sound signal to be represented in musical notation, extracting a characteristic of the received sound signal, and setting various parameters for use in analysis of the sound signal in accordance with the extracted characteristic;

a second step of setting a scale determining condition;

a third step of receiving a sound signal to be represented in musical notation and determining a pitch of the sound signal using the various parameters set by said first step; and

a fourth step of, in accordance with the scale determining condition set by said second step, rounding the pitch determined by said third step to any one of scale notes corresponding to the scale determining condition.

20. A device for receiving a sound signal and automatically representing the sound signal in musical notation, said device comprising:

a first section that receives a sound signal having

09374760:09409

a sound characteristic to be represented in musical notation, extracts a characteristic of the received sound signal, and sets various parameters for use in analysis of the sound signal in accordance with the extracted characteristic;

a second section that sets a scale determining condition;

a third section that receives a sound signal to be represented in musical notation and determines a pitch of the sound signal using the various parameters set by said first section; and

a fourth section that, in accordance with the scale determining condition set by said second section, rounds the pitch determined by said third section to any one of scale notes corresponding to the scale determining condition.

21. A device as recited in claim 20 which further comprises a setting section that sets a unit note length as a predetermined criterion for determining a note length; and

a section that determines a length of the scale note determined by said fourth section from the received sound signal, with an accuracy of the unit note length.

093430 0927260

Sound signal is received which contains sound characteristics to be represented in musical notation. The characteristics are extracted out of the received sound signal, and various parameters for use in subsequent analysis of the sound signal are set in accordance with the extracted characteristics. Also, a desired scale determining condition is set by a user. Pitch of the sound signal is determined using the thus-set parameters. The determined pitch is rounded to any one of scale notes corresponding to the user-set scale determining condition. Also, a given unit note length is set as a predetermined criterion or reference for determining a note length, and a length of the scale note determined from the received sound signal is determined using the thus-set unit note length as a minimum determination unit, i.e., with an accuracy of the unit note length.

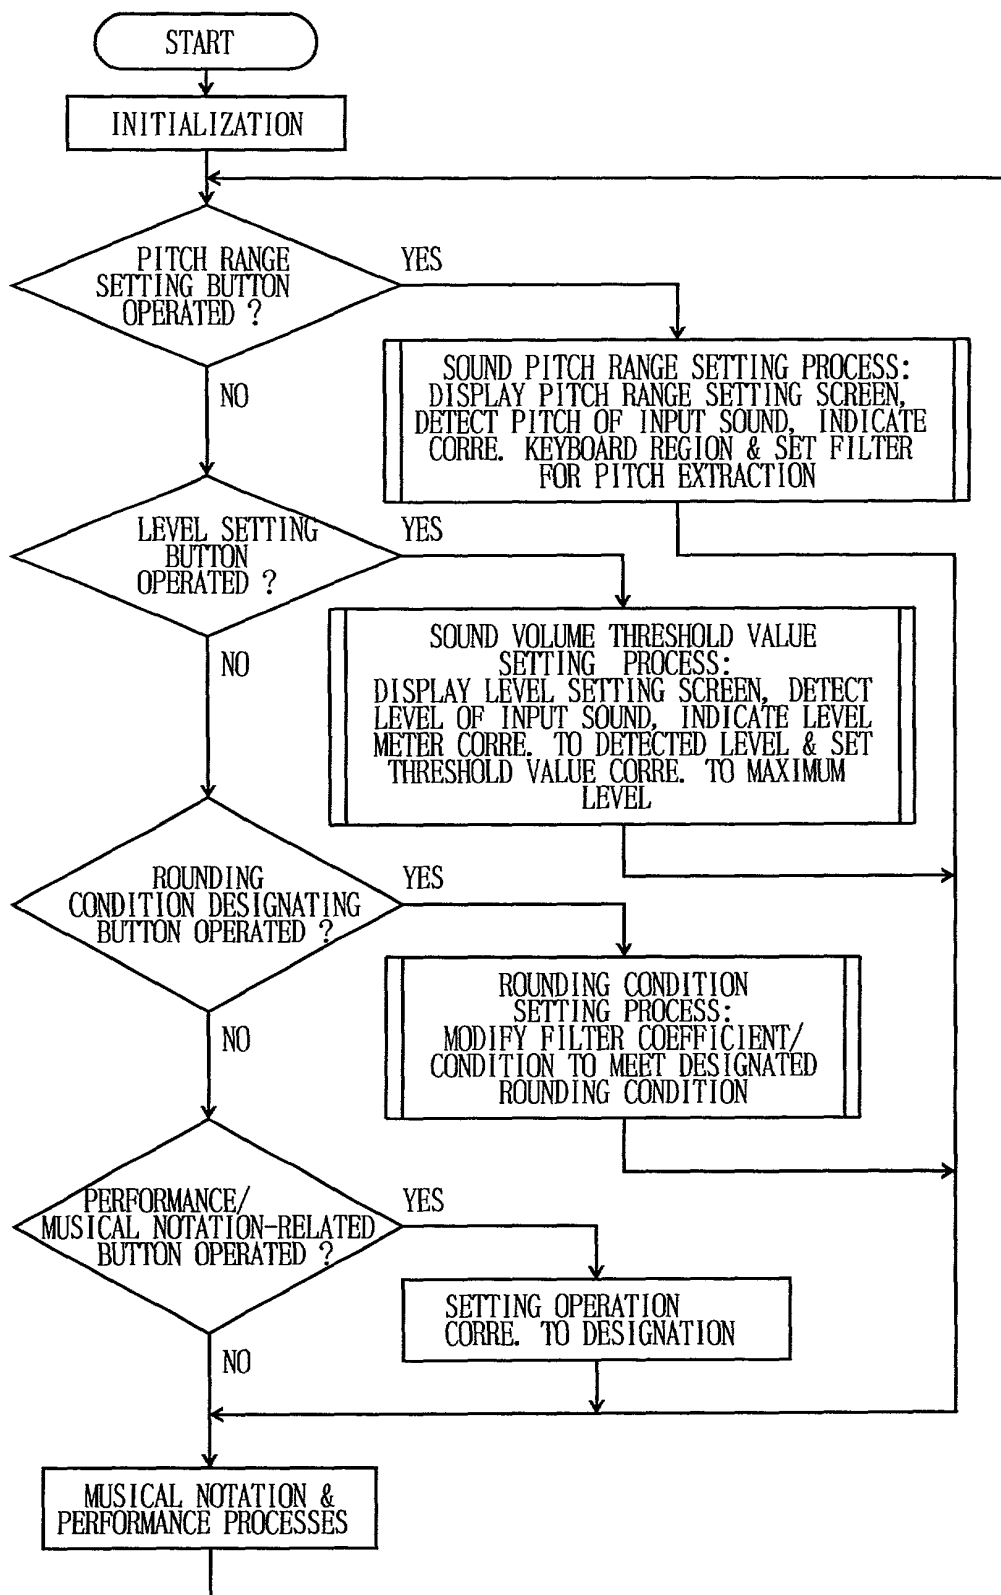


FIG. 1

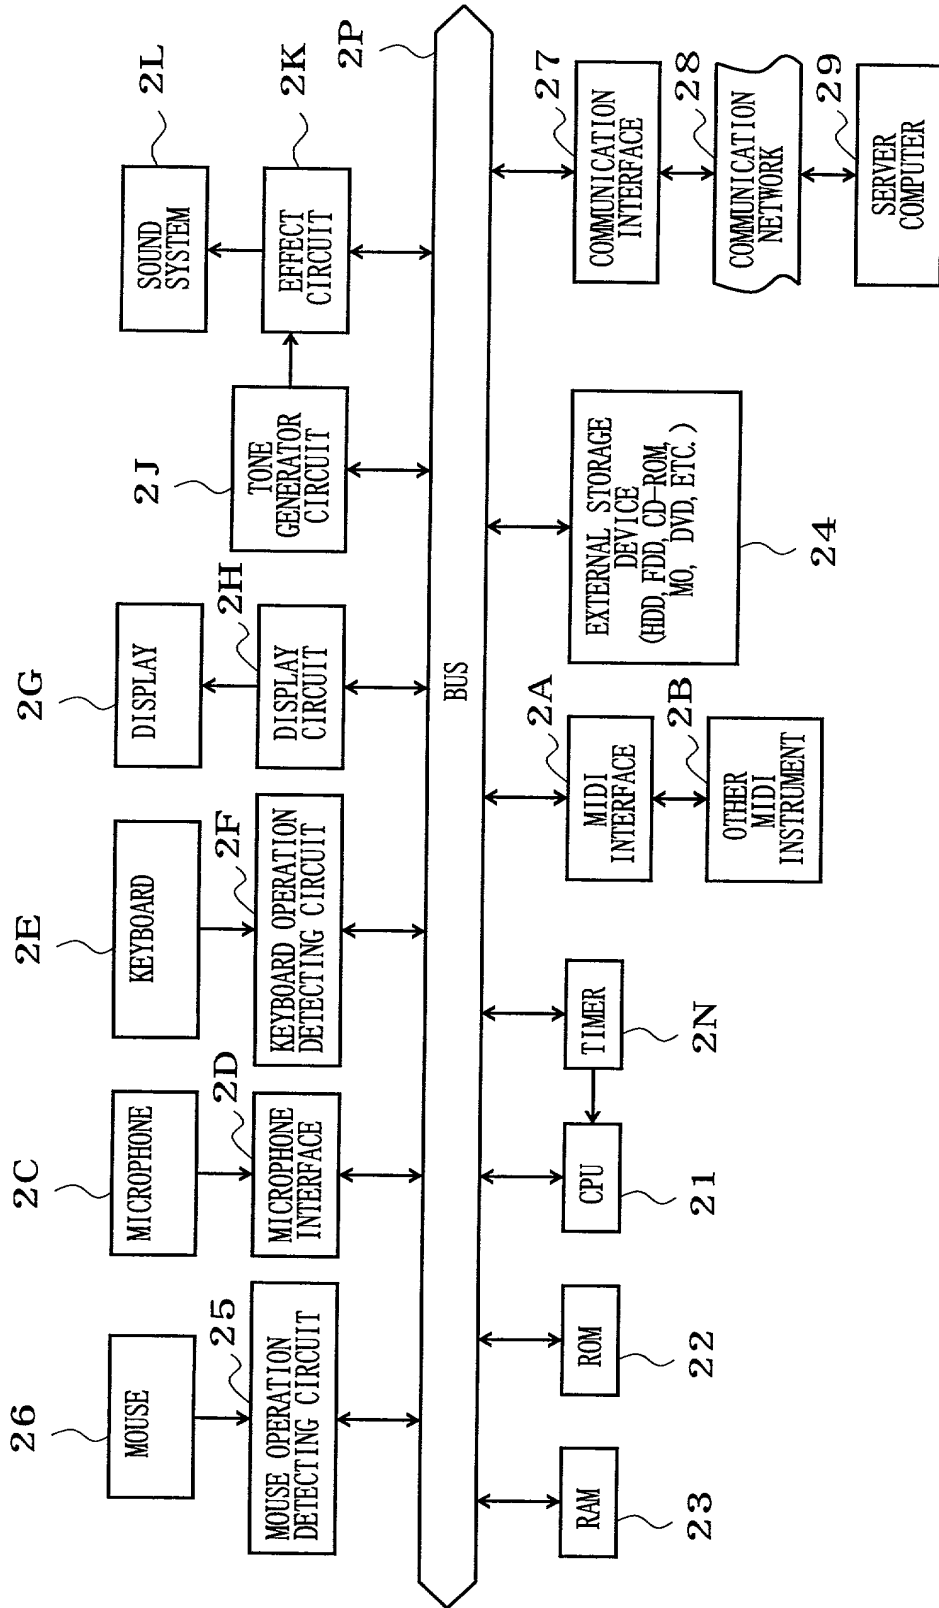


FIG. 2



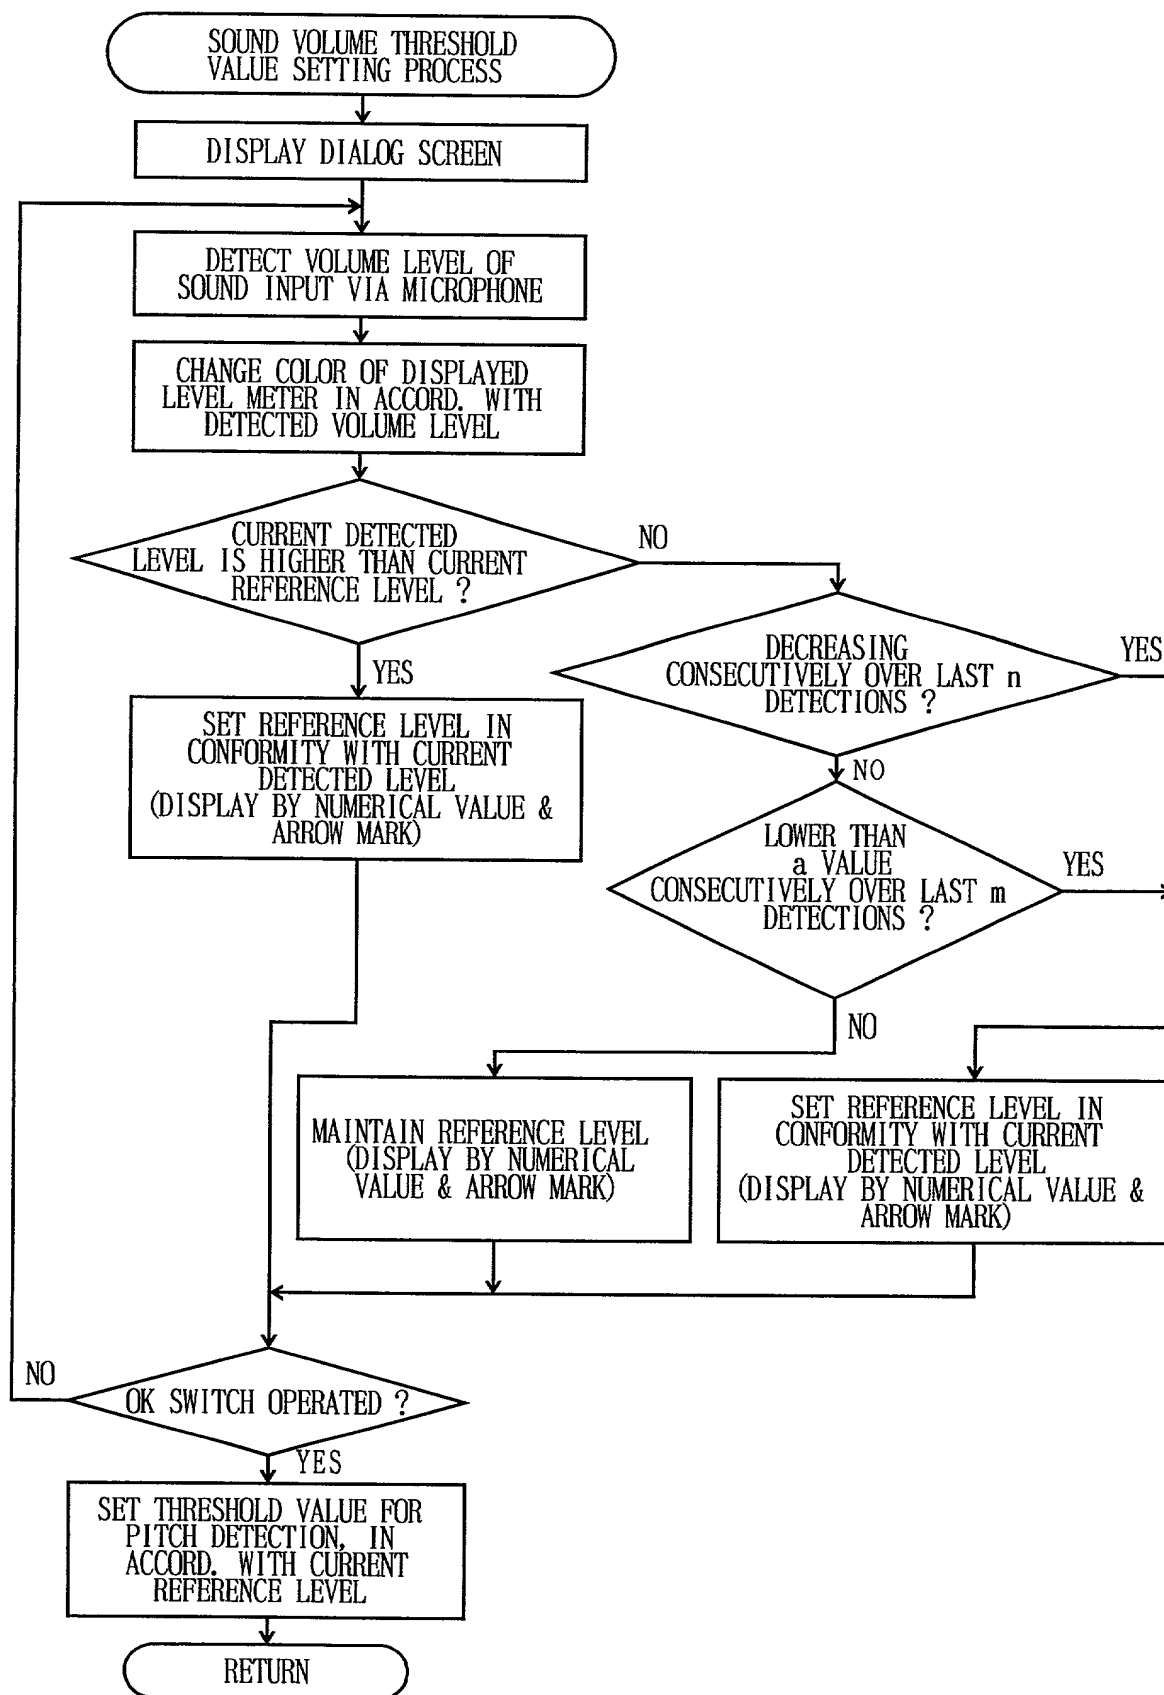


FIG. 4



FIG. 5

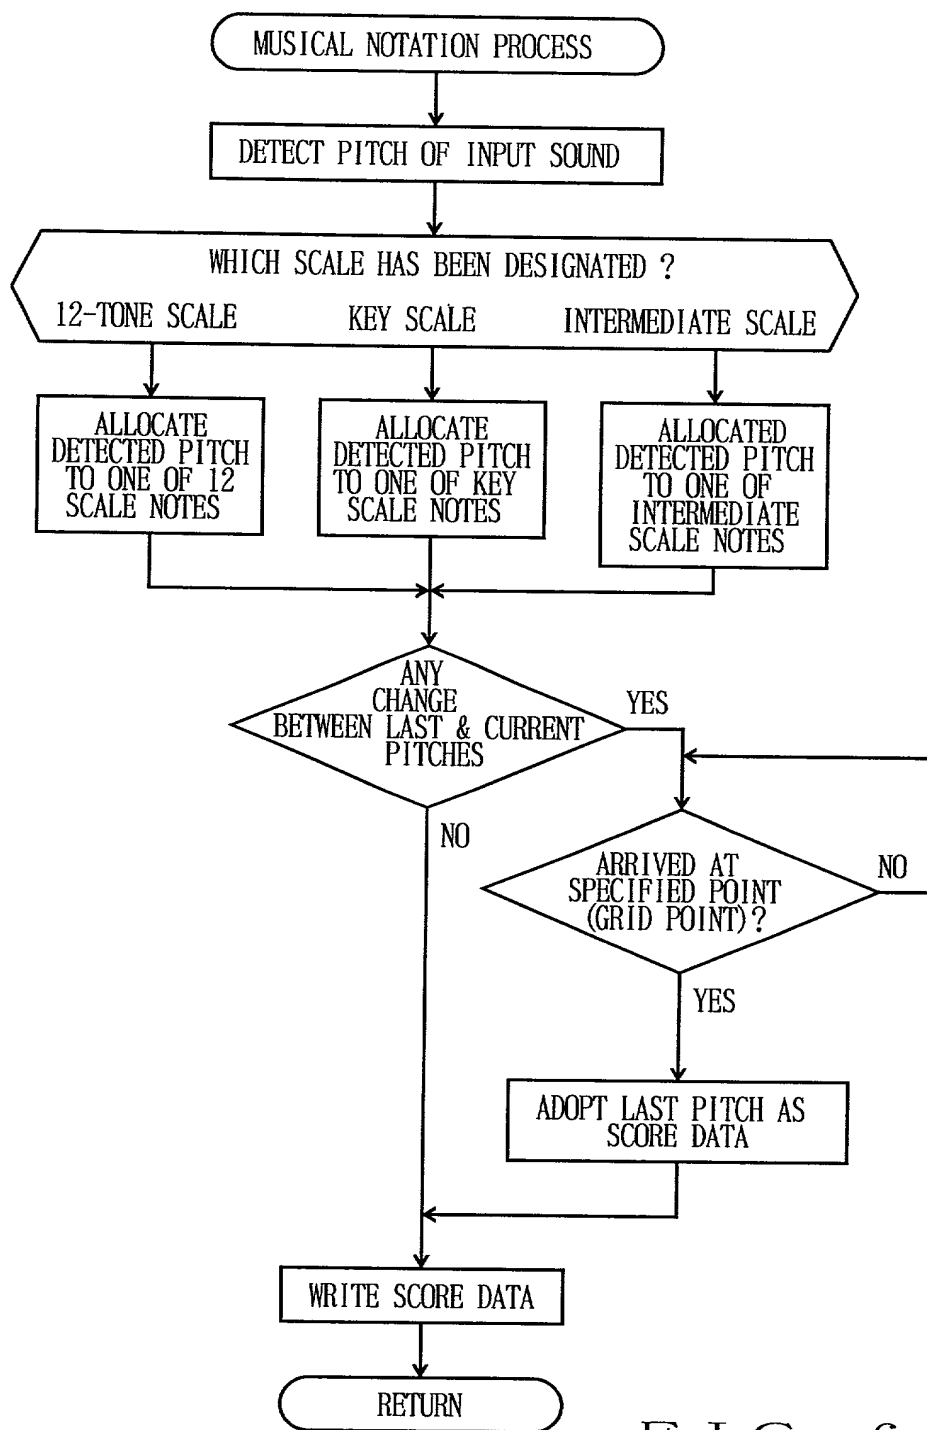


FIG. 6

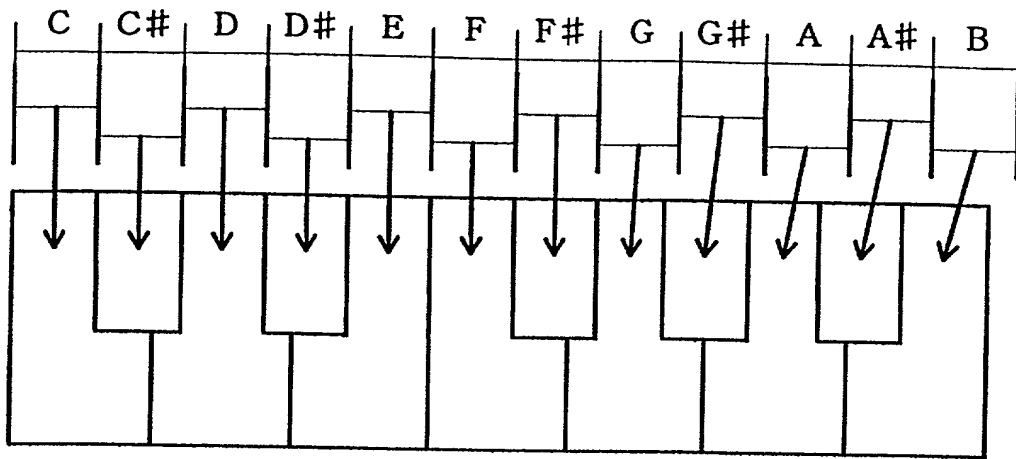


FIG. 8 A

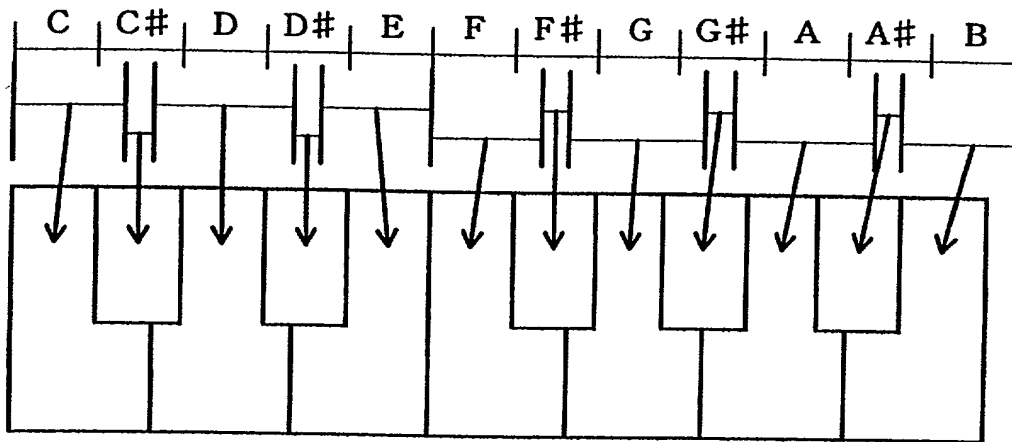


FIG. 8 B


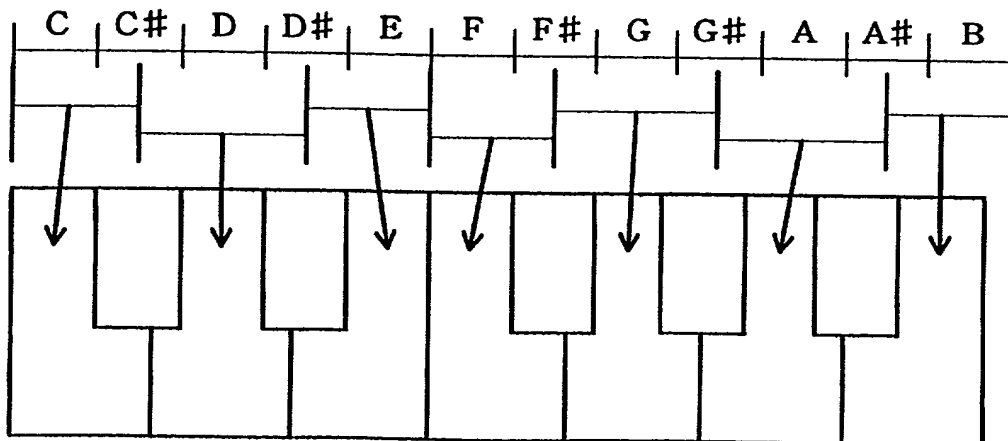


FIG. 8 C

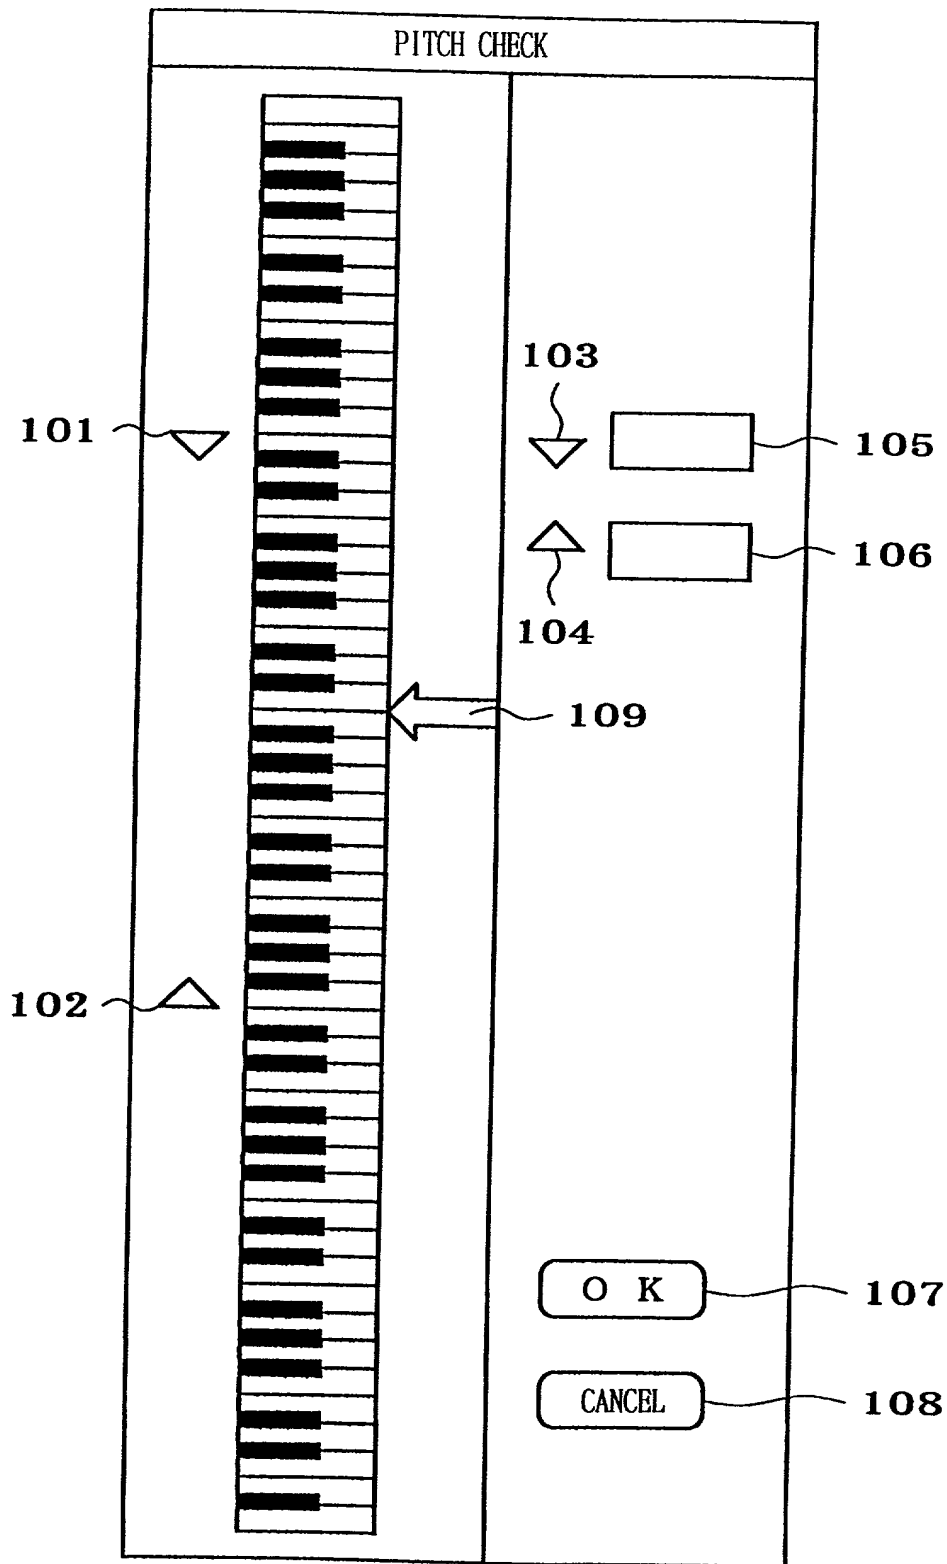

F I G. 1 0

**DECLARATION
and POWER OF ATTORNEY**

☒ ORIGINAL
☐ CONTINUATION
☐ DIVISIONAL

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below at 1-4, of the invention entitled: DEVICE AND METHOD FOR ANALYZING SOUND SIGNAL FOR REPRESENTING THE SIGNAL IN MUSICAL NOTATION

Which is described and claimed in:

☒ the attached specification or
☐ the specification in application Serial No. _____ filed _____ ☐ as amended on _____ (if applicable)
(for declaration not accompanying application)

and for which a patent is sought, and that my residence, post office address and citizenship are as stated below next to my name.
I acknowledge my duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations § 1.56(a).
I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	PATENT APPLICATION NUMBER	DATE OF FILING Month Day Year	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	10-247208	9/1/1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
(Application Serial No.)	(Filing Date)	(Status)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or Agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected herewith.

David L. Fehrman, Reg. No. 28,600; William J. Robinson, Reg. No. 29,430; Vincent J. Beluski, Reg. No. 30,820; David L. Henty, Reg. No. 31,323; Stuart L. Merkadeau, Reg. No. 33,262; Minda R. Schechter, Reg. No. 38,296; David B. Abel, Reg. No. 32,394; Brian M. Berliner, Reg. No. 34,549; David J. Meyer, Reg. No. 33,425; Hisako Muramatsu, Reg. No. 34,955; Victor De Gyrfas, Reg. No. 40,583; Wayne M. Smith, Reg. No. 42,160; Dennis R. Gallagher, Reg. No. 42,563; Lawrence W. Granatelli, Reg. No. 32,228; and Laura A. Majerus, Reg. No. 33,417;

Send correspondence to:
GRAHAM & JAMES LLP
801 S. Figueroa St., 14th Floor
Los Angeles, CA 90017-5554

DIRECT TELEPHONE CALLS TO:
(Name and telephone number)

DAVID L. FEHRMAN
(213) 624-2500

(Please Print)

1	Name of Inventor	LAST NAME FUNAKI	FIRST NAME Tomoyuki	MIDDLE NAME	Residence: CITY Hamamatsu	STATE or COUNTRY Japan
	Post Office Address	C/O YAMAHA CORPORATION, 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka-ken, Japan				CITIZENSHIP Japan
2	Name of Inventor	LAST NAME	FIRST NAME	MIDDLE NAME	Residence: CITY	STATE or COUNTRY
	Post Office Address					CITIZENSHIP
3	Name of Inventor	LAST NAME	FIRST NAME	MIDDLE NAME	Residence: CITY	STATE or COUNTRY
	Post Office Address					CITIZENSHIP
4	Name of Inventor	LAST NAME	FIRST NAME	MIDDLE NAME	Residence: CITY	STATE or COUNTRY
	Post Office Address					CITIZENSHIP

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 1 <i>Tomoyuki Funaki</i>	SIGNATURE OF INVENTOR 2
DATE April 21 1999	DATE
SIGNATURE OF INVENTOR 3	SIGNATURE OF INVENTOR 4
DATE	DATE